




# TECHNICAL SPECIFICATIONS

Max Rated Speed	5,000 RPM
Angular Momentum at Max Rated RPM	26,000 N-M-S
Anti-Rolling Torque at Max Rated RPM	56,000 N-M
Spool-up Time to Max Rated RPM	90 minutes (5,000 RPM)
Spool-up Time to Stabilization	70 minutes (4,250 RPM)
Spool-Up Power	Power Consumption
Spool-Up Power	3000 Watts Max
Operating Power	1000 - 3000 Watts (Sea State Dependent)
AC Power Input	220 VAC, 50/60 Hz, Single Phase
Control Power	240 Watts
Control Power Input	24 VDC @ 10 Amps
Seawater Pump Power Input Over Current Protection based on installed pump rating	220 VAC @ 5 Amps Max
Weight	3,155 lbs (1,431 kg)
Envelope Dimensions	52.7 L x 55.9 W x 40.4 H (inches) 1.338 L x 1.419 W x 1.023 H (meters)
Noise Output	72-74 dBC at 1 meter
Seawater Supply to Heat Exchanger	30 LPM (8 GPM) maximum 15 LPM (4 GPM) minimum
Ambient Air Temperature	0° - 60° C (32° - 140° F)

Marine Service Asia offers the details of this device in good faith but cannot guarantee or warrant the accuracy of this information nor warrant the condition of the device.



# DRAWINGS

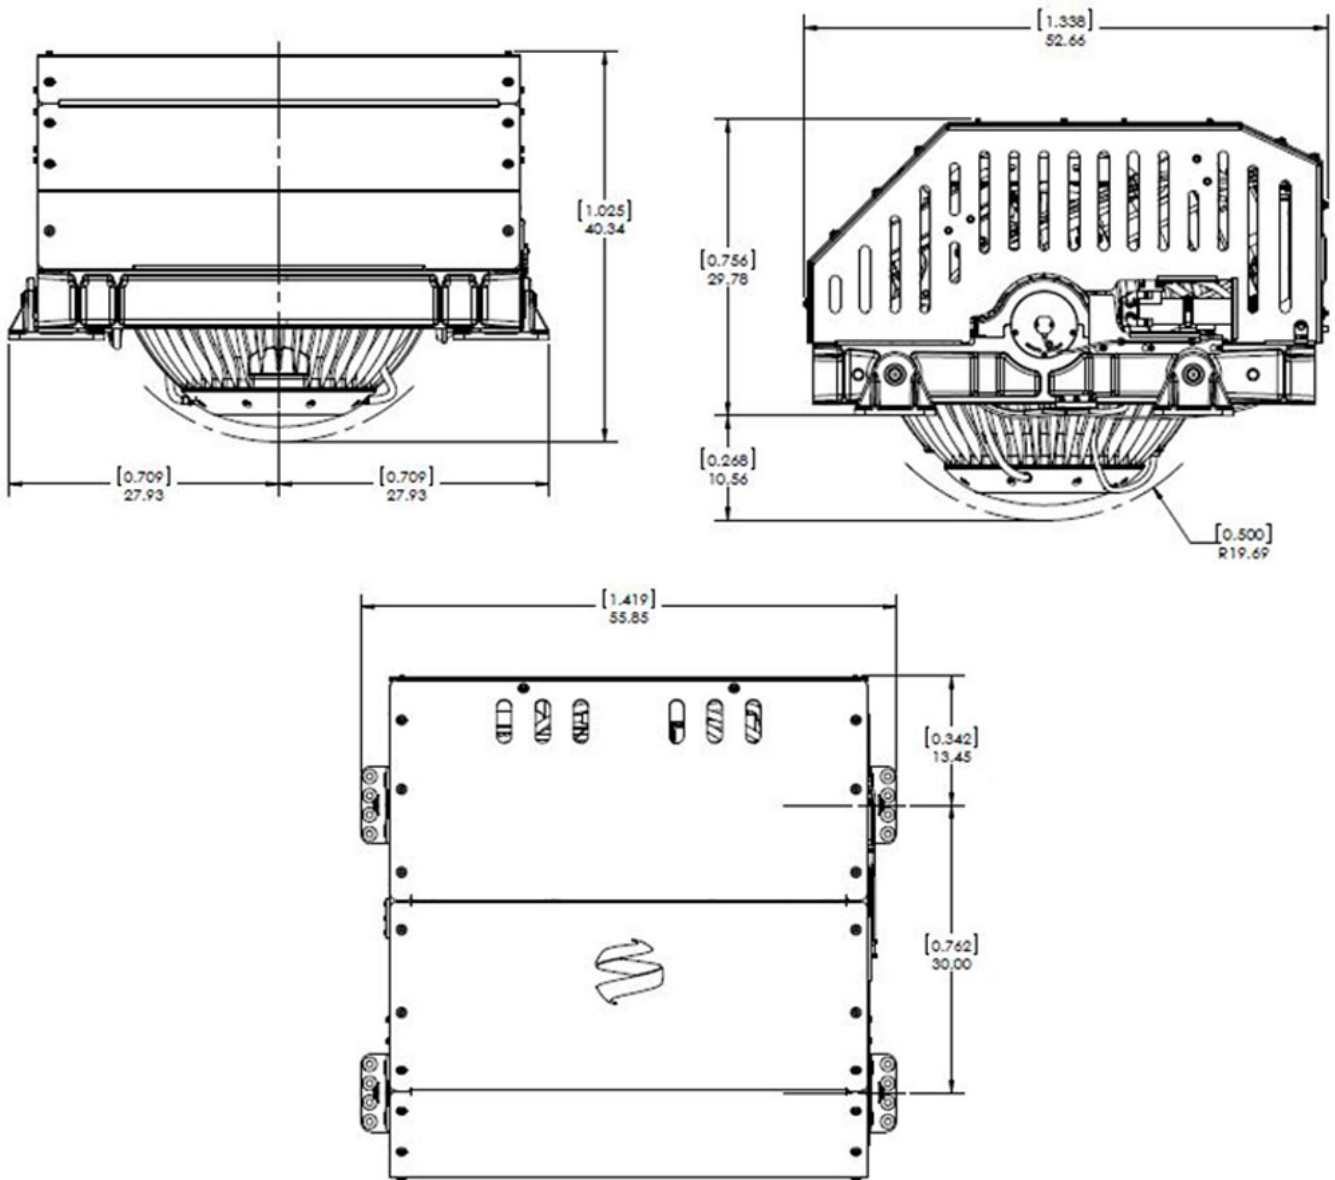

Marine Service Asia offers the details of this device in good faith but cannot guarantee or warrant the accuracy of this information nor warrant the condition of the device.